



BEHRAN DIESEL ENGINE OIL ULTRA SHPD

Top performance synthetic blend diesel engine oil approved by VOLVO and MAN

USES

- **Behran Ultra SHPD** has been developed to cover the requirements of all diesel engines (heavy duty passenger cars and industrial vehicles).
- **Behran Ultra SHPD** is perfectly suited to turbo-charged and multi-valve diesel engines.
- **Behran Ultra SHPD** is a high viscosity index lubricant which formulated with synthetic blend base oil and high performance additives and is tested in the most severe driving conditions and different climate conditions.

excellent detergency and dispersions contributing to cleanliness and a long life. Also gives:

- Superior wear and bearing corrosion control and maximum engine protection
- High resistance to oxidation, contributing to extended lubricant life
- High protection against engine deposits, rust and corrosion
- Easy start in cold climates and engine protection in all temperatures
- Low volatility and evaporation loss
- Reduce fuel consumption
- **Behran Ultra SHPD** has very high viscosity index which gives the properties of both fluid oils (easy starts fuel economy) and viscous oils (perfect lubrication at high temperature, low oil consumption).

PROPERTIES


- Using Behran Ultra SHPD leads to reduce exhaust emissions,

TYPICAL CHARACTERISTICS

Specification	Test Method	15W-40
Viscosity at 100 °C (cSt)	ASTM D-445	15.5
Viscosity Index	ASTM D-2270	140
Flash Point (min) °C	ASTM D-92	220
Pour Point (max) °C	ASTM D-97	-27
Density @ 15°C Kg/m ³	ASTM D-4052	875
Total Base Number mg KOH/g	ASTM D-2896	11.5

PERFORMANCE SPECIFICATION

API CI-4/CH-4/SL, MAN M3275, Mack EO-M, Volvo VDS-3, MB 228.3, ACEA E7-04, MTU-II

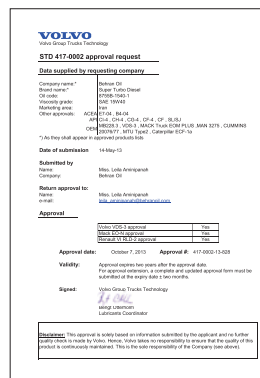

Packaging

- 20 liter plastic pail
- 208 liter new steel drum

